

TT-388

Oil temperature control unit

High temperature device with high functionality

- available as 2-circuit device



Oil up to 360°C

Heating capacity **16 kW** | **24 kW**

Cooling capacity **90 kW @ 360°C**

Cooling system indirect

Applications: moulds, rollers, plates



Functions

- Self-optimizing temperature controller with temperature display 1/10°C – steps
- Display in °C or °F and l/min or gal/min
- Digital flow display and monitoring
- Automatic temperature control
- Switchover for temperature control on the mould
- Heating switchable in stages
- Heaters with cascade connection (only 24 kW)
- Pressure display
- Automatic mould drainage
- Leakstopper device – operation in pressure and vacuum mode possible


Construction

- High temperature pump with mechanical seal or magnetic coupling
- Hot oil circuit with bypass, which ensures the internal oil circulation when the valves are closed
- Limescale free heat exchanger
- No cracking of the oil thanks to special heating construction
- Expansion tank with drip pan
- Unit on castors


Safety features

- Level control for dry run protection
- Expansion vessel with safety shut-off in case of overflow
- Electronic temperature limitation and monitoring in the controller
- Mechanical safety thermostats
- Visual and acoustic fault indications
- Integrated circuit breakers
- Main switch, transformer and motor protection switch

Cooling capacity

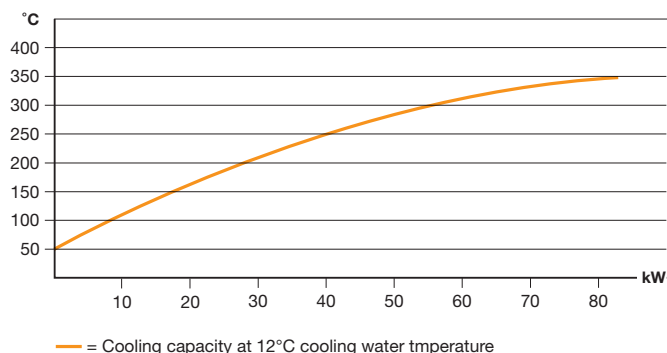

Pump capacity

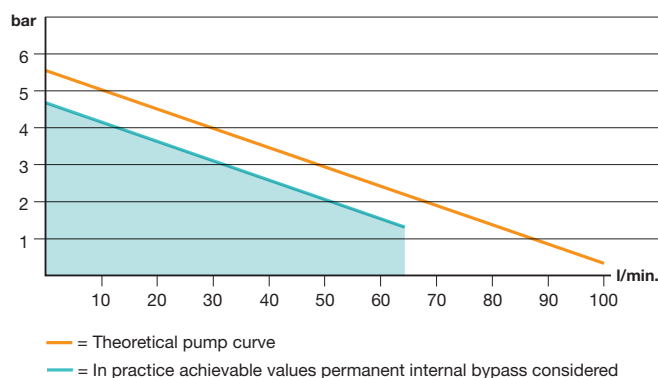

Technical data

Product attribute	Unit	TT-388 16 kW	TT-388 24 kW
Temperature range	°C	Up to 360°C with heat transfer oil TOOL-THERM SH-3	
Temperature control		Self-optimizing, electronic microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.	
Flow control		Electronically, with digital display and automatic control of the minimum flow.	
Heating capacity	kW	16 kW	24 kW
Switchable in stages		8/6	8/16
		Automatic switching of the required heating power	
Cooling capacity		90 kW at 360°C circulating temperature – see diagram	
Pump capacity			
Motor	kW	1,8 kW	
Pressure mode		Max. 5,5 bar / max. 100 l/min. - see diagram	
Vacuum mode		Vacuum max. 8 mH ₂ O	
Model Z		Pump with axial face seal and triple bearing system	
Model A		Pump with seal less magnetic drive	
Temperature measurement at the mould		Yes	Yes
Leakstopper and mould drainage		Yes	Yes
Expansion tank capacity		21 litres	21 litres
Filling amount		15 litres	21 litres
Expansion volume		16 litres	16 litres
Connections			
Oil circuit		¾" BSP female thread	
Cooling water			
Inlet		With water filter 1" BSP female thread	
Outlet		With non-return valve 1" BSP female thread	
Dimensions (L×W×H)	mm	1'240x480x1'400 mm, incl. castors	
Weight	kg	Approx. 205 kg empty	Approx. 215 kg empty
Colour		Silvergrey RAL 7001	